




## Pack-Off Sub

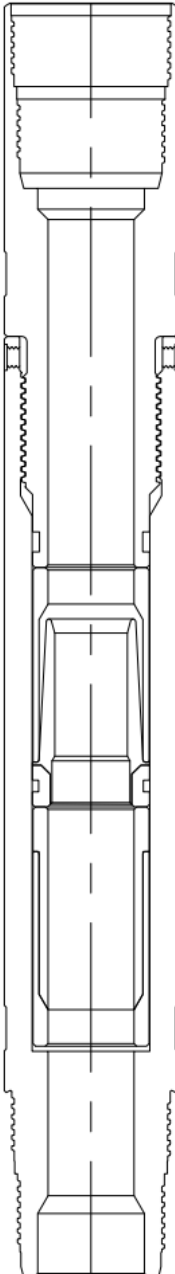

The Pack-Off Sub is generally run above a continuous tubing overshoot and is used to seal off pressure between the coiled tubing fish and the string that is used to strip over and retrieve the coiled tubing from the well bore. The tool is set up to hold pressure from one direction, such as pressuring up on the inside of the work string to establish circulation of the coiled tubing fish. The tool may also be set up to hold pressure from both directions such as pressuring up on the annulus and/or the inside of the tubing at the same or different times.